

**GEKKO®**  
FLOORING ADHESIVES


# G70

## VINYL FIXING SPRAY

- Sprayable Acrylic.
- Ideal for the fast and easy installation of Domestic Cushion Vinyl.
- Plasticizer Migration Resistant.
- Suitable for use with a variety of Subfloors.



## TECHNICAL DATA

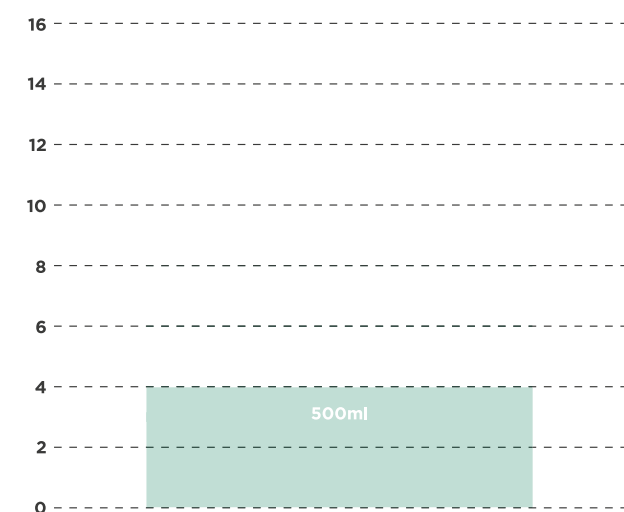

SQUARE METRE COVERAGE (m²)\*:

|              | 500ml           |
|--------------|-----------------|
| Single-sided | 4m <sup>2</sup> |
| Double-sided | n/a             |

APPLICATION TYPE:

**Single-sided**

FLASH-OFF TIME:

**2 - 5 mins**

OPEN TIME:

**50 mins**

COLOUR:

☐ **Clear**

ADHESIVE TYPE:

**SBR**

TYPE:



**500ml**

TIP:



**Fixed**

SPRAY TYPE:



**Web**

\*consult the Spray Manual for a more detailed tutorial on the bonding process.  
\*\*depending on environment & ambient temperature.

## CHEMICAL TECHNICAL DATA

|                        |  |
|------------------------|--|
| Colour                 | Clear  |
| System Flammability    | Non Flam Adhesive/Flam Propellant              |
| Flash-off Time         | 2 - 5 mins depending on atmospheric conditions |
| Open Time              | 50 mins  |
| Temperature Resistance | 100°C  |
| Shelf Life             | 12 months from date of manufacture             |

## HANDLING & STORAGE

- Consult Safety Data Sheet prior to use.
- DO NOT store at temperatures over 50°C.
- Avoid exposure to direct sunlight.
- For optimum performance, store at 18°C during use, but must always be above 10°C.
- DO NOT ALLOW THE PRODUCT TO FREEZE.
- DO NOT store directly on concrete floor.
- Shake well before use.
- For Full Handling and Storage details Consult Material.
- Safety Data Sheet Section 7.
- To prevent a blockage in the spray nozzle, after use turn the can upside down and press the nozzle until adhesive spray is cleared.
- Replace the cap after use to protect the valve.
- Do not use in confined spaces without adequate ventilation and/or respirator.
- For Full PPE Information Consult Safety Data Sheet Section 8.
- Always test product to determine suitability for your particular application prior to use in production.

## COVERAGE



LIGHT COVERAGE



HIGH COVERAGE

## DIRECTIONS FOR USE

- This product is designed to be applied as a single sided bonding system applied directly to the subfloor.
- Prior to use, check compatibility. Spray a small test patch of the adhesive on the substrate. This product may degrade some substrates.
- Before bonding ensure that surfaces are clean, dry and free from dirt, dust, oil, loose paint, wax or grease, etc.
- For best results, the temperature of the adhesive and the surfaces being bonded should be between 16°C - 27°C.
- Use this product with correct PPE and with adequate ventilation.

## SHAKE WELL BEFORE USE

- Spray approximately 4" - 8" away at a 45-60° angle to the surface, applying a uniform coat of adhesive to obtain a good coverage of the surface.
- Adhere surfaces and press together with adequate pressure. A pressure roller can be used to apply uniform pressure to achieve maximum strength.
- Allow 24 hours for the adhesive to fully cure.
- Use **Gekko G93** solvent cleaners to remove any over spray.
- After use to prevent a blockage in the spray nozzle, turn the can upside down and press the nozzle until adhesive spray is cleared.
- Replace the cap after use to protect the valve.
- Store according to the material safety data.

## SUBSTRATES

|            | Dichloromethane Free | Synthetic Grass | Wall Cladding | Sheet Vinyl | Vinyl Tile | Cushion Vinyl (Naked Back) | Cushion Vinyl (Felt Back) | PVC Profiles | Carpet- Gel Backed | Carpet - Synthetic Backed | Fibre Bond Carpets | Carpet Tiles |
|------------|----------------------|-----------------|---------------|-------------|------------|----------------------------|---------------------------|--------------|--------------------|---------------------------|--------------------|--------------|
| <b>G70</b> | ●                    |                 |               |             |            | ●                          | ●                         |              |                    |                           |                    |              |

## SUBFLOORS

| PU Underlay | Rubber Crumb Underlay | Rubber Underlay | Rubber Floorcoverings | Linoleum (Marmoleum) | Stair Nosings | Carpet Gripper | Flooring Grade Ply | Hardboard | Chipboard | OSB Board | Concrete | Sand & Cement | Ceramic | EPS |
|-------------|-----------------------|-----------------|-----------------------|----------------------|---------------|----------------|--------------------|-----------|-----------|-----------|----------|---------------|---------|-----|
|             |                       |                 |                       |                      |               |                | ●                  | ●         | ●         | ●         | ●        | ●             |         |     |